



G-BOND

Advanced Optical Enhancements

GDS leads the market in improving the performance and protection of flat panel displays

Using advanced technology to overcome the optical problems with LCD screens, we offer advanced optical solutions and bonding at affordable prices.

Because commercially available LCD displays do not offer enough brightness, they often produce a 'washed out' image when used outdoors or in other high ambient light conditions.

The exclusive G-BOND process from GDS results in a greater reduction of light reflections compared to other display enhancement technologies.

GDS Worldwide


GDS has been providing advanced display solutions for 30 years, serving the needs of the most demanding industries. GDS offers a reliable partnership from research to developing leading-edge display products, with vertically integrated in-house manufacturing, seamless global service, legacy support and long-term continuity of supply.





How G-BOND technology operates


$$\frac{\text{White Luminance + Reflection}}{\text{Black Luminance + Reflection}} = \text{Contrast Ratio}$$

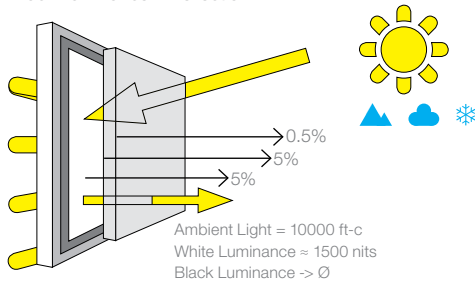

$$\text{Reflection} = 10000 \text{ ft-c} \times 10.5\% = 1050 \text{ nits}$$

$$\frac{1500+1050}{1050} = 2.4:1 \text{ Contrast}$$

Each transition point, air to glass or glass to air, reflects over 4% of the ambient light. These reflections reduce the contrast and readability of the display, especially in high ambient, uncontrollable lighting applications.

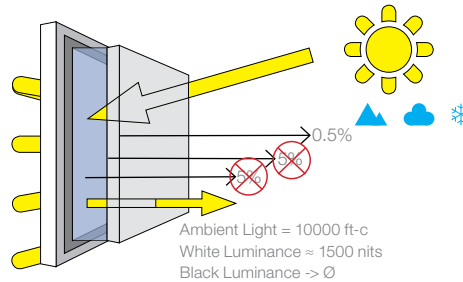

$$\text{Reflection} = 10000 \text{ ft-c} \times 0.5\% = 50 \text{ nits}$$

$$\frac{1500+50}{50} = 31:1 \text{ Contrast}$$

Direct bonding eliminates the two internal points of reflection. With AR coatings on the front, overall reflections drop to less than 1%. The lack of an air-gap increases thermal conductivity, preventing heat build-up. Additionally, solid bond prevents moisture from forming on the inside of the front cover glass.

These formulas are simplified to demonstrate the Contrast Ratio and are indicative of how the bonding application works under sunlight conditions.

What is GDS G-BOND technology?

GDS G-BOND technology is a cost-effective, display-enhancing lamination process which allows a cover glass (anti-reflective, acrylic, touch screen) to be optically bonded directly onto the front of a flat LCD panel.

By eliminating the air-gap between the display and the cover surface glass, as well as improving outdoor legibility and ruggedization, GDS G-BOND technology resolves many of the optical and environmental challenges related to:

- sunlight and high ambient light conditions
- extreme operating environments (i.e. temperature, humidity, vibrations, shocks)

GDS G-BOND also allows the front cover surface to be repaired or replaced if necessary (i.e. due to vandalism, failure, etc). This ensures the best Total Cost of Ownership of the display system and avoids its premature disposal when problems arise.

The advanced process of GDS G-BOND allows displays of 70"+ to be optically bonded.

Benefits of optical bonding

Optical

- G-BOND reduces the reflective loss from all surfaces to less than 1% using an AR coated glass
- G-BOND increases contrast by 3-5 times minimum

Environment

- G-BOND eliminates the air gap, preventing moisture and condensation behind the cover surface
- G-BOND eliminates the need for cleaning by preventing dust from collecting between the flat panel and the cover surface
- G-BOND increases thermal conductivity, lowering the display temperature
- Appropriate front cover surface can improve scratch and impact resistance

Mechanical

- G-BOND reduces the gravity effect on large screen flat panels
- G-BOND avoids the airflow pressure required in air-gap outdoor solutions



Available Features

Contrast Enhancing Windows

AR Glass: Heat strengthened • Diffusion levels between 90 and 105 gloss

• Up to 6mm in thickness

ITO and Heater: ITO: 13 Ohms/sq or 4 Ohms/sq • AR and Heater glass

• AR and ITO glass • AR, ITO and Heater

Privacy Film Added: 3M louvered film can be laminated behind either windows or touch screens prior to optical bonding

Touch Screens: Projective capacitive • Resistive • Capacitive • SAW • IR touch

Active and Passive Brightness Enhancements

Active Brightness: LED rail replacements • Third party and proprietary high

bright LED and CCFL backlights **Passive Brightness Films:** DBEF • BEFs • ESR

Applications and Markets

Transportation: Marine navigation • GPS • Avionics • In-vehicle

computer systems **Medical:** Ambulatory • Patient monitors • Medical imaging

Test and Measurement: Portable logic analyzers • Oscilloscopes

Point of Sale: ATMs • Order verification kiosks **Information:** Kiosks

• Advertising • E-signage **Military:** Ruggedized PC • Portable devices

Americas

GDS Clearview | 1815 NW 169th Place Suite 5050
Beaverton, OR 97006 | United States of America
T. +1 503 617-4715 | F. +1 503 617-2298
america@gds.com

Europe

GDS Spa | Via Tezze, 20/a | 36073 Cornedo (Vicenza) | Italy
T. +39 0445 428991 | F. +39 0445 428992
emea@gds.com

Asia Pacific

Global Display Solutions (Su-Zhou) Co., Ltd
No. 468, Fenhu National Highway Rd. | Luxu Town, Wujiang City
Jiangsu Province, 215211 | China
T. +86 512 63276278 | F. +86 512 63276279
asiapacific@gds.com

www.gds.com